

# Bootstrap 5 Lessons Source Code

[Bootstrap 5 Containers](#)

[Bootstrap 5 Grid Rows and Columns](#)

[Text and Typography](#)

[How to update Image Classes](#)

[Bootstrap 5 Table Classes](#)

[Bootstrap 5 Colors](#)

[Bootstrap 5 Alerts Components](#)

[Bootstrap 5 Accordion Components](#)

[Bootstrap 5 Buttons Components](#)

[Card Component Bootstrap 5](#)

[Bootstrap 5 Nav and NavBar Responsive](#)

[Bootstrap 5 Carousel](#)

[Bootstrap 5 Modal component](#)

[Bootstrap 5 Utilities](#)

## Bootstrap 5 Containers

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width,
initial-scale=1">
```

```
<link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>
<body>
  <div class="container box">
    <h1>Hello, world 1</h1>
    <div>Container 1</div>
  </div>
  <div class="container-fluid box">
    <h1>Hello, world 2</h1>
    <div>Container 2</div>
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>
</html>
```

## Bootstrap 5 Grid Rows and Columns

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
```

```
<meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>
<body>
  <div style="height:50px"> </div>
  <div class="container box">
    <h1>Hello, world 1</h1>
    <div class="row">
      <div class="col box">One</div>
      <div class="col box">Two</div>
      <div class="col box">Three</div>
    </div>
    <div class="row">
      <div class="col box">One</div>
      <div class="col box">Two</div>
      <div class="col box">Three</div>
      <div class="col box">Four</div>
    </div>
    <div>Container 1</div>
    <div class="row">
      <div class="col-sm-2 box">One</div>
      <div class="col-sm-4 box">Two</div>
      <div class="col-sm-2 box">Three</div>
```

```

    <div class="col-sm-4 box">Four</div>
</div>
<div class="row">
    <div class="col-xl-2 box">One</div>
    <div class="col-xl-4 box">Two</div>
    <div class="col-xl-2 box">Three</div>
    <div class="col-xl-4 box">Four</div>
</div>
<div class="row">
    <div class="col-sm-1 box">One</div>
    <div class="col-sm-2 box">Two</div>
    <div class="col-sm-3 box">Three</div>
    <div class="col-sm-4 box">Four</div>
</div>
</div>
<div style="height:50px"> </div>
<div class="container-fluid box">
    <h1>Hello, world 2</h1>
    <div class="row">
        <div class="col box">One</div>
        <div class="col box">Two</div>
        <div class="col box">Three</div>
    </div>
    <div>Container 2</div>
    <div class="row">
        <div class="col-sm-2 box">One</div>
        <div class="col-sm-4 box">Two</div>
        <div class="col-sm-2 box">Three</div>

```

```

    <div class="col-sm-4 box">Four</div>
  </div>
  <div class="row">
    <div class="col-xl-2 box">One</div>
    <div class="col-xl-4 box">Two</div>
    <div class="col-xl-2 box">Three</div>
    <div class="col-xl-4 box">Four</div>
  </div>
  <div class="row">
    <div class="col-sm-1 box">One</div>
    <div class="col-sm-2 box">Two</div>
    <div class="col-sm-3 box">Three</div>
    <div class="col-sm-4 box">Four</div>
  </div>
</div>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>
</html>

```

## Text and Typography

```

<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">

```

```
<meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>
<body>
  <div style="height:50px"> </div>
  <div class="container box">
    <h1>Hello, world 1</h1>
    <div class="h1">Hello World 1</div>
    <h2>Hello, world 1</h2>
    <div class="h2">Hello World 1</div>
    <div class="display-1">Display 1</div>
    <div class="display-2">Display 2</div>
    <div class="display-3">Display 3</div>
    <div class="display-4">Display 4</div>
    <div class="display-5">Display 5</div>
    <div class="display-6">Display 6</div>
    <small>Small</small>
    <mark>Mark</mark>
    <code>Code</code>
    <br>
    <span class="small">Small</span>
    <span class="mark">Mark</span>
```

```
<ul class="list-unstyled">
  <li>One</li>
  <li>Two</li>
  <li>Three</li>
  <li>Four</li>
</ul>

<ul class="list-inline">
  <li class="list-inline-item">One</li>
  <li class="list-inline-item">Two</li>
  <li class="list-inline-item">Three</li>
  <li class="list-inline-item">Four</li>
</ul>

<dl class="row">
  <dt class="col-sm-6">Title</dt>
  <dd class="col-sm-2">Ele 1</dd>
  <dd class="col-sm-2">Ele 2</dd>
  <dd class="col-sm-2">Ele 3</dd>
  <dt class="col-sm-6">Title</dt>
  <dd class="col-sm-3">Ele 1</dd>
  <dd class="col-sm-3">Ele 2</dd>
  <dt class="col-sm-6">Title</dt>
  <dd class="col-sm-6">Ele 1</dd>
</dl>

<dl>
  <dt>Title</dt>
  <dd>Ele 1</dd>
  <dd>Ele 2</dd>
</dl>
```

```

    <dd>Ele 3</dd>
  </dl>

  <div>Container 1 Container 1Container 1 Container
1Container 1 Container 1Container 1 Container 1Container 1
Container 1Container 1 Container 1Container 1 Container
1Container 1 Container 1Container 1 Container 1Container 1
Container 1Container 1 Container 1Container 1 Container 1</div>

</div>
<div style="height:50px"> </div>
<div class="container-fluid box">
  <h1>Hello, world 2</h1>
  <div>Container 2</div>
</div>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>
</html>

```

## How to update Image Classes

```

<!doctype html>
<html lang="en">

```



```

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>

<body>
  <div style="height:50px"> </div>
  <div class="container box">
    <p class="h1">Container 1</p>
    <div>Container 1 Container 1Container 1Container
1Container 1Container 1Container 1Container 1Container
1Container 1</div>
    <div>Container 1 Container 1Container 1Container
1Container 1Container 1Container 1Container 1Container
1Container 1</div>
    <div>Container 1 Container 1Container 1Container
1Container 1Container 1Container 1Container 1Container
1Container 1</div>

```

```

<div>Container 1 Container 1Container 1Container
1Container 1Container 1Container 1Container 1Container
1Container 1</div>
  
</div>
<div style="height:50px"> </div>
<div class="container-fluid box">
  <p class="h1">Container 2</p>
  <div>Container 2</div>
  
</div>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>

```

## Bootstrap 5 Table Classes

```

<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width,
initial-scale=1">

```

```

<link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>
<body>
  <div class="container box">
    <h1>Hello, world 1</h1>
    <div>Container 1</div>
    <table class="table table-hover table-dark
table-borderless">
      <thead><tr>
        <th>First</th>
        <th>Last</th>
      </tr></thead>
      <tbody>
        <tr>
          <td>Laurence</td>
          <td>Svekis</td>
        </tr>
        <tr>
          <td>Larry</td>
          <td>Svekis</td>
        </tr>
        <tr>
          <td>John</td>
          <td>Svekis</td>

```

```

    </tr>
    <tr>
      <td>Laurence</td>
      <td>Doe</td>
    </tr>
  </tbody>
</table>
</div>
<div class="container-fluid box">
  <h1>Hello, world 2</h1>
  <div><table class="table table-striped table-bordered
table-primary">
    <thead class="table-success"><tr>
      <th>First</th>
      <th>Last</th>
    </tr></thead>
    <tbody>
      <tr >
        <td>Laurence</td>
        <td>Svekis</td>
      </tr>
      <tr>
        <td>Larry</td>
        <td>Svekis</td>
      </tr>
      <tr>
        <td>John</td>
        <td>Svekis</td>

```

```
    </tr>
    <tr>
      <td>Laurence</td>
      <td>Doe</td>
    </tr>
  </tbody>
</table></div>
</div>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>
</html>
```

## Bootstrap 5 Colors

```
<!doctype html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
```

```
<title>Bootstrap 5</title>
</head>

<body>
  <div class="container box">
    <h1>Hello, world 1</h1>
    <div class="text-muted">Container muted</div>
    <div class="text-primary">Container primary</div>
    <div class="text-success">Container success</div>
    <div class="text-info">Container Info</div>
    <div class="text-warning">Container Warning</div>
    <div class="text-danger">Container Danger</div>
    <div class="text-secondary">Container secondary</div>
    <div class="text-dark">Container Dark</div>
    <div class="text-light">Container Light</div>
  </div>
  <div class="container-fluid box">
    <h1>Hello, world 2</h1>
    <div class="bg-muted">Container muted</div>
    <div class="bg-primary">Container primary</div>
    <div class="bg-success">Container success</div>
    <div class="bg-info">Container Info</div>
    <div class="bg-warning">Container Warning</div>
    <div class="bg-danger">Container Danger</div>
    <div class="bg-secondary">Container secondary</div>
    <div class="bg-dark text-light">Container Dark</div>
    <div class="bg-light text-dark">Container Light</div>
  </div>
</body>
</html>
```

```
<div></div>
</div>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>
</html>
```

## Bootstrap 5 Alerts Components

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>
<body>
```

```

<div class="container box">
  <h1>Hello, world 1</h1>
  <div class="alert alert-success">Container Alert <a
class="alert-link" href="#">Link</a></div>
  <div class="alert alert-primary">Container Alert <a
class="alert-link" href="#">Link</a></div>
  <div class="alert alert-warning">Container Alert <a
class="alert-link" href="#">Link</a></div>
  <div class="alert alert-danger">Container Alert <a
class="alert-link" href="#">Link</a></div>
  <div class="alert alert-info">Container Alert</div>
  <div class="alert alert-secondary">Container Alert</div>
</div>
<div class="container-fluid box">
  <h1>Hello, world 2</h1>
  <div class="alert alert-success alert-dismissible">Container
Alert
  <a class="alert-link" href="#">Link</a>
  <button type="button" class="btn-close"
data-bs-dismiss="alert"></button>
  </div>
  <div class="alert alert-danger alert-dismissible">Container
Alert
  <a class="alert-link" href="#">Link</a>
  <button type="button" class="btn-close"
data-bs-dismiss="alert"></button>
  </div>

```



```

<div class="alert alert-info alert-dismissible fade
show">Container Alert
  <a class="alert-link" href="#">Link</a>
  <button type="button" class="btn-close"
data-bs-dismiss="alert"></button>
</div>
<div class="alert alert-primary alert-dismissible fade
show">Container Alert
  <a class="alert-link" href="#">Link</a>
  <button type="button" class="btn-close"
data-bs-dismiss="alert"></button>
</div>
<div></div>
</div>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>

```

## Bootstrap 5 Accordion Components

```

<!doctype html>
<html lang="en">

<head>
  <meta charset="utf-8">

```

```

<meta name="viewport" content="width=device-width,
initial-scale=1">
<link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
<link href="style.css" rel="stylesheet">
<title>Bootstrap 5</title>
</head>

<body>
<div class="container box">
<h1>Hello, world 1</h1>
<div class="accordion" id="acc1">
<div class="accordion-item">
<h2 class="accordion-header" id="head1">
<button class="accordion-button" type="button"
data-bs-toggle="collapse" data-bs-target="#open1">
Open One
</button>
</h2>
<div id="open1" class="accordion-collapse collapse"
data-bs-parent="#acc1">
<div class="accordion-body">
This is where the content goes!!
</div>
</div>
</div>

```

```

<div class="accordion-item">
  <h2 class="accordion-header" id="head2">
    <button class="accordion-button" type="button"
data-bs-toggle="collapse" data-bs-target="#open2">
      Open Two
    </button>
  </h2>
  <div id="open2" class="accordion-collapse collapse "
data-bs-parent="#acc1">
    <div class="accordion-body">
      Hello World
    </div>
  </div>
</div>

<div class="accordion-item">
  <h2 class="accordion-header" id="head3">
    <button class="accordion-button" type="button"
data-bs-toggle="collapse" data-bs-target="#open3">
      Open Three
    </button>
  </h2>
  <div id="open3" class="accordion-collapse collapse "
data-bs-parent="#acc1">
    <div class="accordion-body">
      Hello World #3
    </div>
  </div>

```

```
    </div>
  </div>

  </div>
</div>
<div class="container-fluid box">
  <h1>Hello, world 2</h1>

  <div></div>
</div>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>
```

## Bootstrap 5 Buttons Components

```
<!doctype html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
```

```

<link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
<link href="style.css" rel="stylesheet">
<title>Bootstrap 5</title>
</head>

<body>
<div class="container box">
  <h1>Hello, world 1</h1>
  <div class="btn btn-primary">Button</div>
  <button type="button" class="btn btn-secondary">Button
1</button>
  <button type="button" class="btn btn-info">Button 1</button>
  <button type="button" class="btn btn-success">Button
1</button>
  <div class="d-grid">
    <div class="btn btn-danger btn-block">Button 1</div>
  </div>
  <button type="button" class="btn btn-warning">Button
1</button>
  <button type="button" class="btn btn-dark">Button 1</button>
  <button type="button" class="btn btn-link">Button 1</button>
</div>
</div>
<div class="container-fluid box">
  <h1>Hello, world 2</h1>

```

```

<div> <button type="button" class="btn btn-outline-secondary
active">Button 1</button>
  <button type="button" class="btn btn-outline-info btn-lg
disabled">Button 1</button>
  <button type="button" class="btn
btn-outline-success">Button 1</button>
  <button type="button" class="btn btn-outline-danger
btn-sm">Button 1</button>
  <button type="button" class="btn
btn-outline-warning">Button 1</button>
  <button type="button" class="btn btn-outline-dark">Button
1</button>
  <button type="button" class="btn btn-outline-link">Button
1</button>
</div>
<div class="btn btn-primary">
  <div class="spinner-border"></div>
  Loading...
</div>
<div class="btn btn-danger">
  <div class="spinner-border spinner-border-sm"></div>
  Loading...
</div>
<div class="btn btn-success">
  <div class=" spinner-grow"></div>
  Loading...
</div>

```

```

<div class="btn-group-vertical">
  <div class="btn btn-success">Click</div>
  <div class="btn btn-danger">Click</div>
  <div class="btn btn-primary">Click</div>
  <div class="btn btn-info">Click</div>
</div>

<div class="btn-group btn-group-lg">
  <div class="btn btn-success">Click</div>
  <div class="btn btn-danger">Click</div>
  <div class="btn btn-primary">Click</div>
  <div class="btn-group">
    <div class="btn btn-secondary dropdown-toggle"
data-bs-toggle="dropdown">
      Open
    </div>
    <div class="dropdown-menu">
      <div class="dropdown-item">Click 1</div>
      <div class="dropdown-item">Click 2</div>
      <div class="dropdown-item">Click 3</div>
    </div>
  </div>
</div>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>

```

```
</body>
```

```
</html>
```

## Card Component Bootstrap 5

```
<!doctype html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>

<body>
  <div class="container box">
    <div class="row">
      <div class="col">
        <div class="card">
          
          <div class="card-header bg-primary text-light">
            Author
```



```

    </div>
    <div class="card-body">
      Laurence Svekis
    </div>
    <div class="card-footer">
      Contact info
    </div>
  </div>
</div>
<div class="col">
  <div class="card">
    
    <div class="card-header bg-primary text-light">
      Author
    </div>
    <div class="card-body">
      Laurence Svekis
    </div>
    <div class="card-footer">
      Contact info
    </div>
  </div>
</div>
<div class="col-md">
  <div class="card">
    
    <div class="card-img-overlay">
      <p class="card-text">Laurence Svekis</p>


```

```
        <button class="btn btn-primary">More</button>
    </div>
    <div class="card-header bg-primary text-light">
        Author
    </div>
    <div class="card-body">
        Laurence Svekis
    </div>
    <div class="card-footer">
        Contact info
    </div>
</div>
</div>
<div>
    <h1>Hello, world 1</h1>
</div>
```

```
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>
```

## Bootstrap 5 Nav and NavBar Responsive

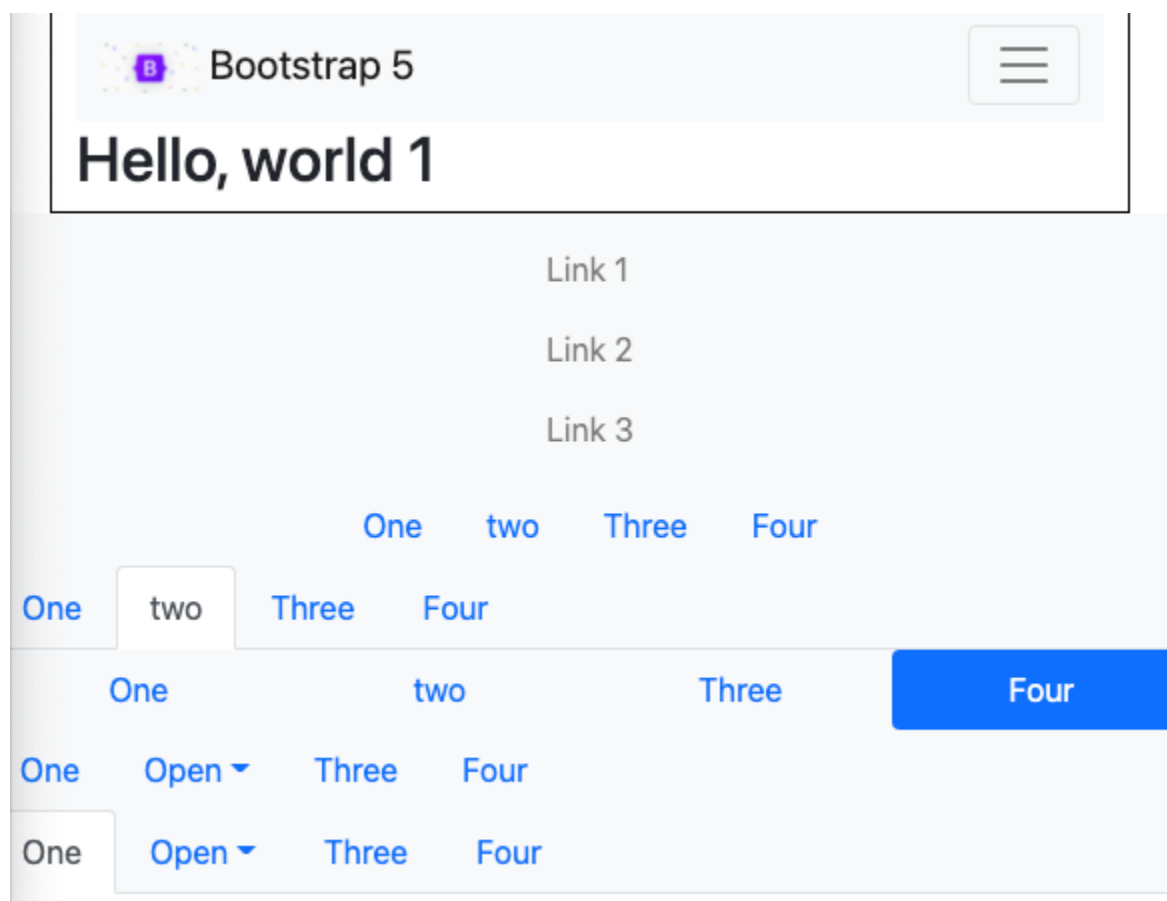

```
<!doctype html>
<html lang="en">
```

```

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>

<body>
  <div class="container box">

    <nav class="navbar navbar-expand-md bg-light navbar-light
justify-content-center">
      <div class="container-fluid">
        <div class="navbar-brand">
          
          Bootstrap 5
        </div>
        <button class="navbar-toggler" type="button"
data-bs-toggle="collapse" data-bs-target="#mainNav">
          <span class="navbar-toggler-icon"></span>
        </button>
        <div class="collapse navbar-collapse" id="mainNav">
          <ul class="navbar-nav">

```

```
<li class="nav-item">
  <a href="#" class="nav-link ">Link 1</a>
</li>
<li class="nav-item">
  <a href="#" class="nav-link ">Link 2</a>
</li>
<li class="nav-item">
  <a href="#" class="nav-link ">Link 3</a>
</li>
<li class="nav-item">
  <a href="#" class="nav-link ">Link 4</a>
</li>
<li class="nav-item">
  <a href="#" class="nav-link ">Link 5</a>
</li>
</ul>
</div>
</div>
</nav>
```

```
<h1>Hello, world 1</h1>
</div>
<nav class="navbar navbar-expand-md bg-light navbar-light
justify-content-center">
  <ul class="navbar-nav">
    <li class="nav-item">
```

```
    <a href="#" class="nav-link ">Link 1</a>
  </li>
  <li class="nav-item">
    <a href="#" class="nav-link ">Link 2</a>
  </li>
  <li class="nav-item">
    <a href="#" class="nav-link ">Link 3</a>
  </li>
</ul>
</nav>
```

```
<ul class="nav justify-content-center bg-light">
  <li class="nav-item"><a href="#"
class="nav-link">One</a></li>
  <li class="nav-item"><a href="#"
class="nav-link">two</a></li>
  <li class="nav-item"><a href="#"
class="nav-link">Three</a></li>
  <li class="nav-item"><a href="#"
class="nav-link">Four</a></li>
</ul>
```

```
<ul class="nav nav-tabs bg-light">
  <li class="nav-item"><a href="#"
class="nav-link">One</a></li>
```

```

    <li class="nav-item"><a href="#" class="nav-link
active">two</a></li>
    <li class="nav-item"><a href="#"
class="nav-link">Three</a></li>
    <li class="nav-item"><a href="#"
class="nav-link">Four</a></li>
</ul>

<ul class="nav nav-pills bg-light nav-justified">
    <li class="nav-item"><a href="#"
class="nav-link">One</a></li>
    <li class="nav-item"><a href="#"
class="nav-link">two</a></li>
    <li class="nav-item"><a href="#"
class="nav-link">Three</a></li>
    <li class="nav-item"><a href="#" class="nav-link
active">Four</a></li>
</ul>

<ul class="nav nav-pills bg-light ">
    <li class="nav-item"><a href="#"
class="nav-link">One</a></li>
    <li class="nav-item dropdown">
        <a href="#" data-bs-toggle="dropdown" class="nav-link
dropdown-toggle">Open</a>
        <div class="dropdown-menu">
            <div>
                <a href="#" class="dropdown-item">1</a>

```

```

    </div>
    <div>
      <a href="#" class="dropdown-item">2</a>
    </div>
    <div>
      <a href="#" class="dropdown-item">3</a>
    </div>
  </div>
</li>
<li class="nav-item"><a href="#"
class="nav-link">Three</a></li>
  <li class="nav-item"><a href="#" class="nav-link
">Four</a></li>
</ul>

<ul class="nav nav-tabs bg-light ">
  <li class="nav-item"><a href="#" class="nav-link
active">One</a></li>
  <li class="nav-item dropdown">
    <a href="#" data-bs-toggle="dropdown" class="nav-link
dropdown-toggle">Open</a>
    <div class="dropdown-menu">
      <div>
        <a href="#" class="dropdown-item">1</a>
      </div>
      <div>
        <a href="#" class="dropdown-item">2</a>
      </div>
    </div>
  </li>

```




```
    <div>
      <a href="#" class="dropdown-item">3</a>
    </div>
  </div>
</li>
<li class="nav-item"><a href="#"
class="nav-link">Three</a></li>
  <li class="nav-item"><a href="#" class="nav-link
">Four</a></li>
</ul>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>
```

# Bootstrap 5 Carousel

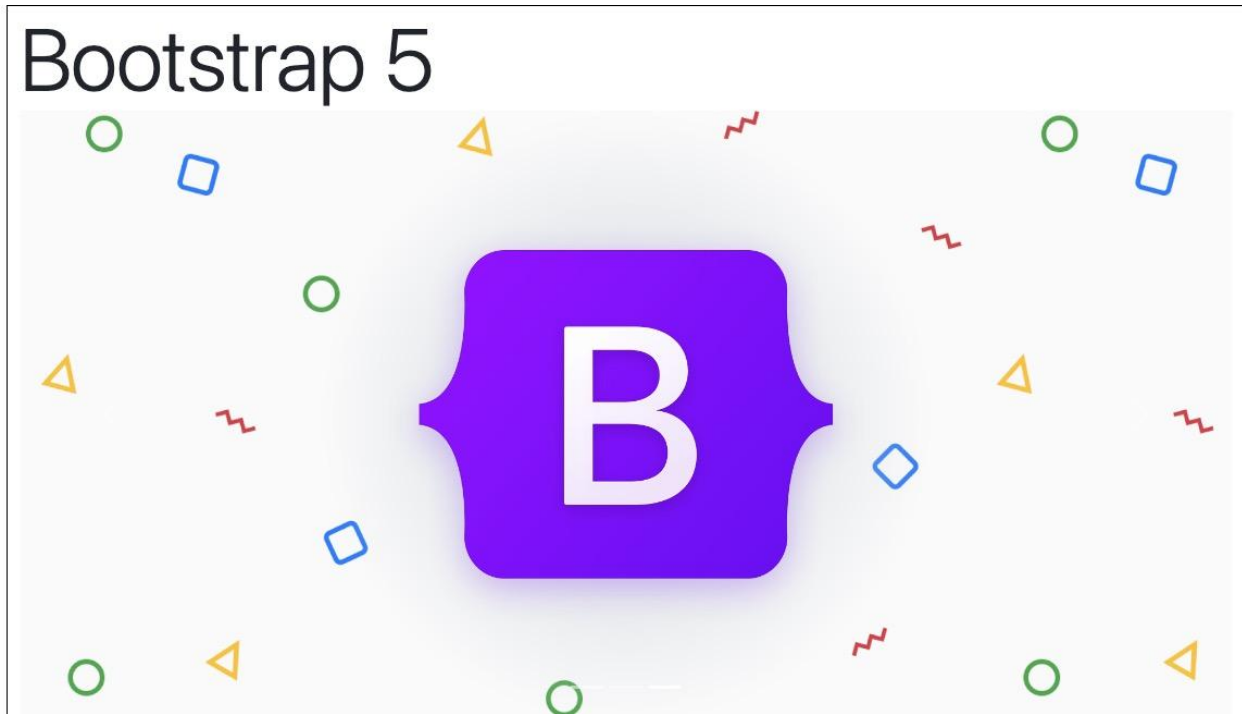

```
<!doctype html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>
```

```

<body>
  <div class="container box">
    <div class="display-1 ">Bootstrap 5</div>
    <div class="carousel slide" data-bs-ride="carousel"
id="car1">
      <div class="carousel-indicators">
        <button type="button" data-bs-target="#car1"
class="active" data-bs-slide-to="0"></button>
        <button type="button" data-bs-target="#car1"
data-bs-slide-to="1"></button>
        <button type="button" data-bs-target="#car1"
data-bs-slide-to="2"></button>
      </div>

      <div class="carousel-inner">
        <div class="carousel-item active">
          
        </div>
        <div class="carousel-item ">
          
        </div>
        <div class="carousel-item ">
          
        </div>

```

```
</div>

  <button class="carousel-control-prev" type="button"
data-bs-target="#car1" data-bs-slide="prev">
  <span class="carousel-control-prev-icon"></span>
</button>


  <button class="carousel-control-next" type="button"
data-bs-target="#car1" data-bs-slide="next">
  <span class="carousel-control-next-icon"></span>
</button>

</div>
</div>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>
```

# Bootstrap 5 Modal component

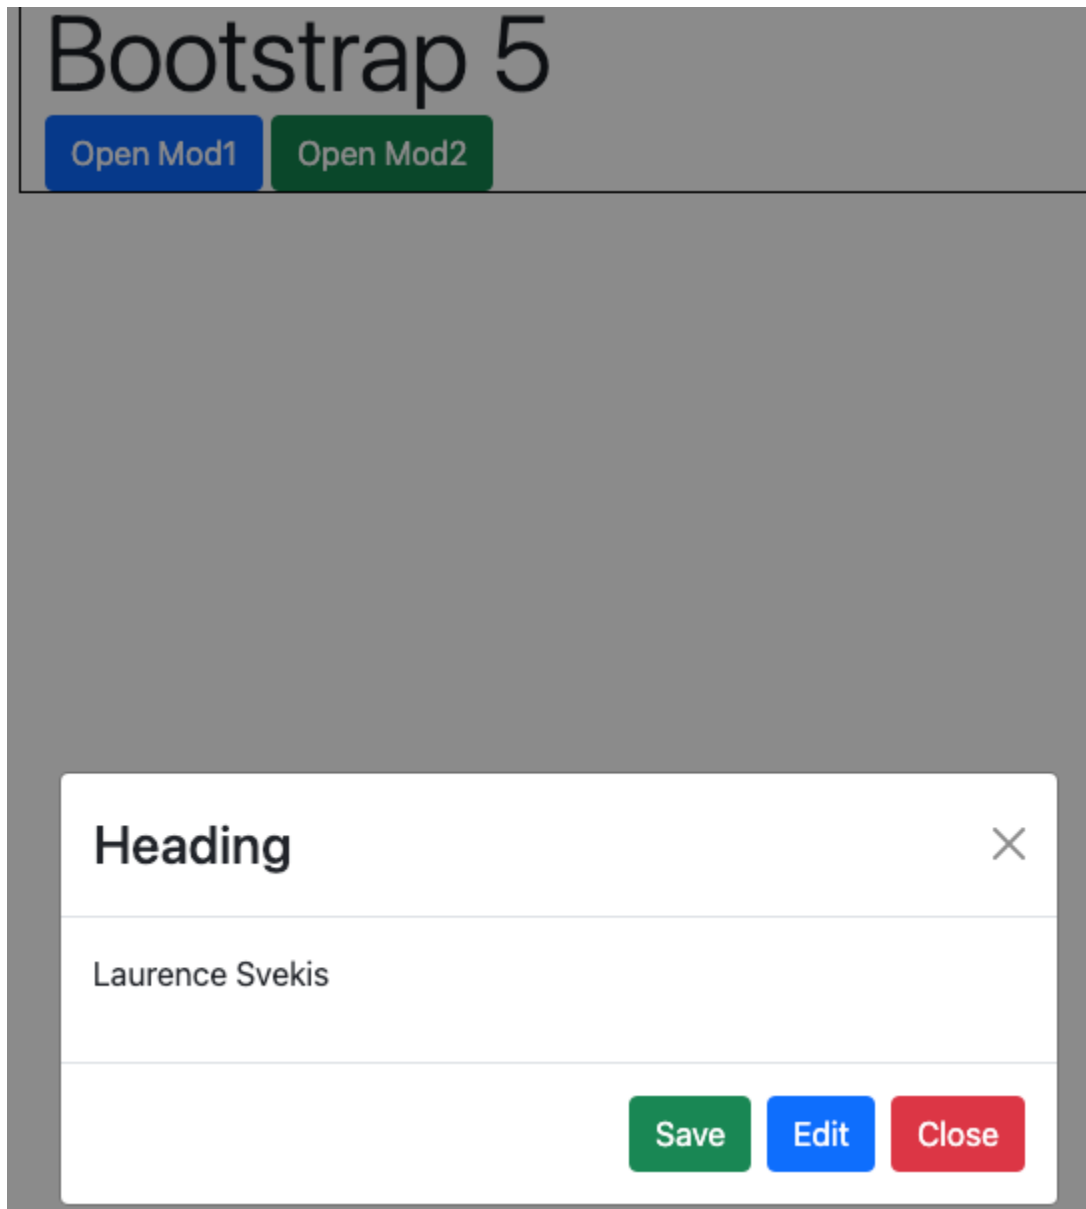

```
<!doctype html>  
<html lang="en">  
  
<head>  
<meta charset="utf-8">
```

```

<meta name="viewport" content="width=device-width,
initial-scale=1">
<link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
<link href="style.css" rel="stylesheet">
<title>Bootstrap 5</title>
</head>

<body>
<div class="container box">
  <div class="display-1 ">Bootstrap 5</div>
  <div class="btn btn-primary" data-bs-toggle="modal"
data-bs-target="#mod1">Open Mod1</div>
  <div class="btn btn-success" data-bs-toggle="modal"
data-bs-target="#mod2">Open Mod2</div>
</div>

<div class="modal fade" id="mod1">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        <h2 class="modal-title">Heading</h2>
        <button type="button" class="btn-close"
data-bs-dismiss="modal"></button>
      </div>
      <div class="modal-body">

```

```

        <p>Laurence Svekis</p>
    </div>
    <div class="modal-footer">
        <button type="button" class="btn btn-success"
>Save</button>
        <button type="button" class="btn btn-primary"
>Edit</button>
        <button type="button" class="btn btn-danger"
data-bs-dismiss="modal">Close</button>
    </div>
</div>
</div>
</div>
</div>

<div class="modal fade" id="mod2">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header">
                <h2 class="modal-title">Heading</h2>
                <button type="button" class="btn-close"
data-bs-dismiss="modal"></button>
            </div>
            <div class="modal-body">
                <p>Laurence Svekis</p>
            </div>
            <div class="modal-footer">

```

```
        <button type="button" class="btn btn-primary"
data-bs-dismiss="modal">Close</button>
    </div>
</div>
</div>
</div>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>
```



# Bootstrap 5 Utilities

The diagram illustrates various Bootstrap 5 utility classes. It consists of several components:

- A list of five elements, each with a different colored border: Element 1 (blue), Element 2 (red), Element 3 (yellow), Element 4 (cyan), and Element 5 (grey).
- A large heading "Bootstrap 5" centered at the top.
- A blue horizontal bar labeled "ELEMENT 1".
- A red circle labeled "element 2".
- A yellow rounded rectangle containing the text "Laurence Svekis" and "Hello World".
- A cyan-bordered box labeled "Element 4".
- A grey horizontal bar labeled "Element 5" at the bottom.

```

<!doctype html>
<html lang="en">

<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1">
  <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/boot
strap.min.css" rel="stylesheet">
  <link href="style.css" rel="stylesheet">
  <title>Bootstrap 5</title>
</head>

<body>
  <div class="container box">
    <div class="display-1 ">Bootstrap 5</div>
    <div class="border border-1 border-primary
text-decoration-underline">Element 1</div>
    <div class="border border-2 border-danger fw-bold">Element
2</div>
    <div class="border border-3 border-warning fst-italic
lh-lg">Element 3</div>
    <div class="border border-4 border-info">Element 4</div>
    <div class="border-start">Element 5</div>
  </div>

  <div class="container box text-center" style="height:600px">

```

```
<div class="display-1 ">Bootstrap 5</div>
<div class="border rounded bg-primary m-5
text-uppercase">Element 1</div>
<div class="border rounded-circle bg-danger w-25 h-25
text-lowercase">Element 2</div>
<div class="border rounded-pill w-50 bg-warning h-25 mx-auto
text-capitalize fs-1">laurence svekis hello World</div>
<div class="border border-4 border-info p-4
shadow-lg">Element 4</div>
<div class="border-start pt-4 fs-2">Element 5</div>
</div>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootst
rap.bundle.min.js"></script>
</body>

</html>
```